



**general  
rubber**

800-233-6294


Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Job/Project: \_\_\_\_\_

Ref/Tag: \_\_\_\_\_

## Style 1093 Round PTFE Single Layer

1093 Round-0000-3.16

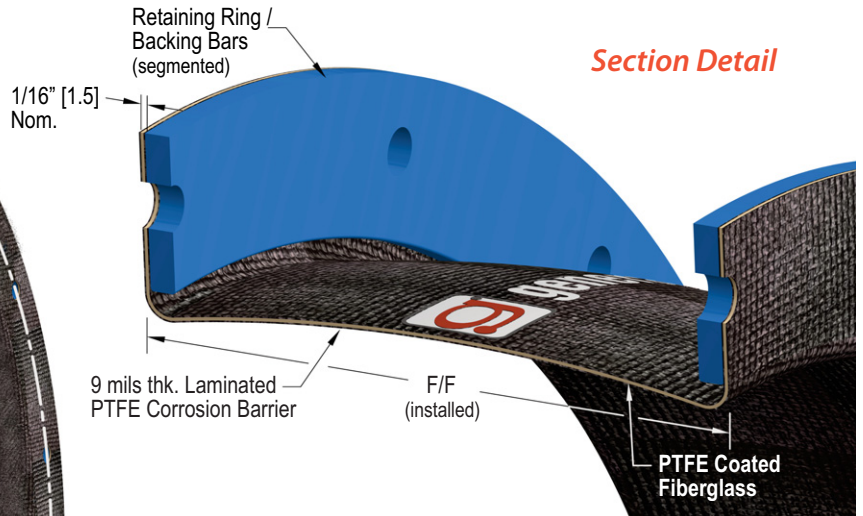

Reinforcement	Laminated PTFE
PTFE Coated Fiberglass	° F [° C] 600 [315]

### Bill of Materials

ITEM	MATERIAL	FINISH
Retaining Ring / Backing Bars	<input type="checkbox"/> Carbon Steel	Shop Prime
	<input type="checkbox"/> Stainless Steel	Plain
Reinforcement	PTFE Fluoropolymer Coated Fiberglass	
Barrier (tube & cover)	9 mils thk. laminated PTFE corrosion barrier	

### Operational Parameters (customer specified)

Size ID (DN) <input type="text"/>	BC <input type="text"/>	OD <input type="text"/>	Pressure <input type="text"/>	F/F <input type="text"/>
Hole Dia. <input type="text"/>	No. Holes <input type="text"/>	Qty <input type="text"/>	Vacuum <input type="text"/>	Temp. <input type="text"/>

SIZE		MOVEMENT (non-concurrent)			PRESSURE	
Installed Lengths F/F in [mm]	MFD Length F/F + in [mm]	Comp. in [mm]	Ext. in [mm]	Lateral in [mm]	Pressure psig [ barg]	Vacuum psig [ barg]
3 1/2 [89] -6 [152]	1/2 [13]	2 [51]	1/2 [13]	1 [25]	3 [0.2]	-3 [-0.2]
6 1/2 [165] -9 [229]	3/4 [19]	3 [76]	3/4 [19]	2 [51]	3 [0.2]	-3 [-0.2]
9 1/2 [241] -12 [305]	1 [25]	4 [102]	1 [25]	3 [76]	3 [0.2]	-3 [-0.2]
12 1/2 [318] -16 [406]	1 [25]	5 [127]	1 [25]	4 [102]	3 [0.2]	-3 [-0.2]

Available in round or rectangular, hot dipped galvanized rings / bars, custom offsets as well as reducing arrangements. Available in external or internal flanges.

Contact General Rubber Corporation for full product specifications, Warnings and installation instructions.

© 2016 General Rubber Corporation, All Rights Reserved

general-rubber.com