



**general
rubber**

800-233-6294


Customer: _____ Date: _____

Job/Project: _____

Ref/Tag: _____

Style 1095 Round PTFE Single Layer

1095 Round-0000-3.16

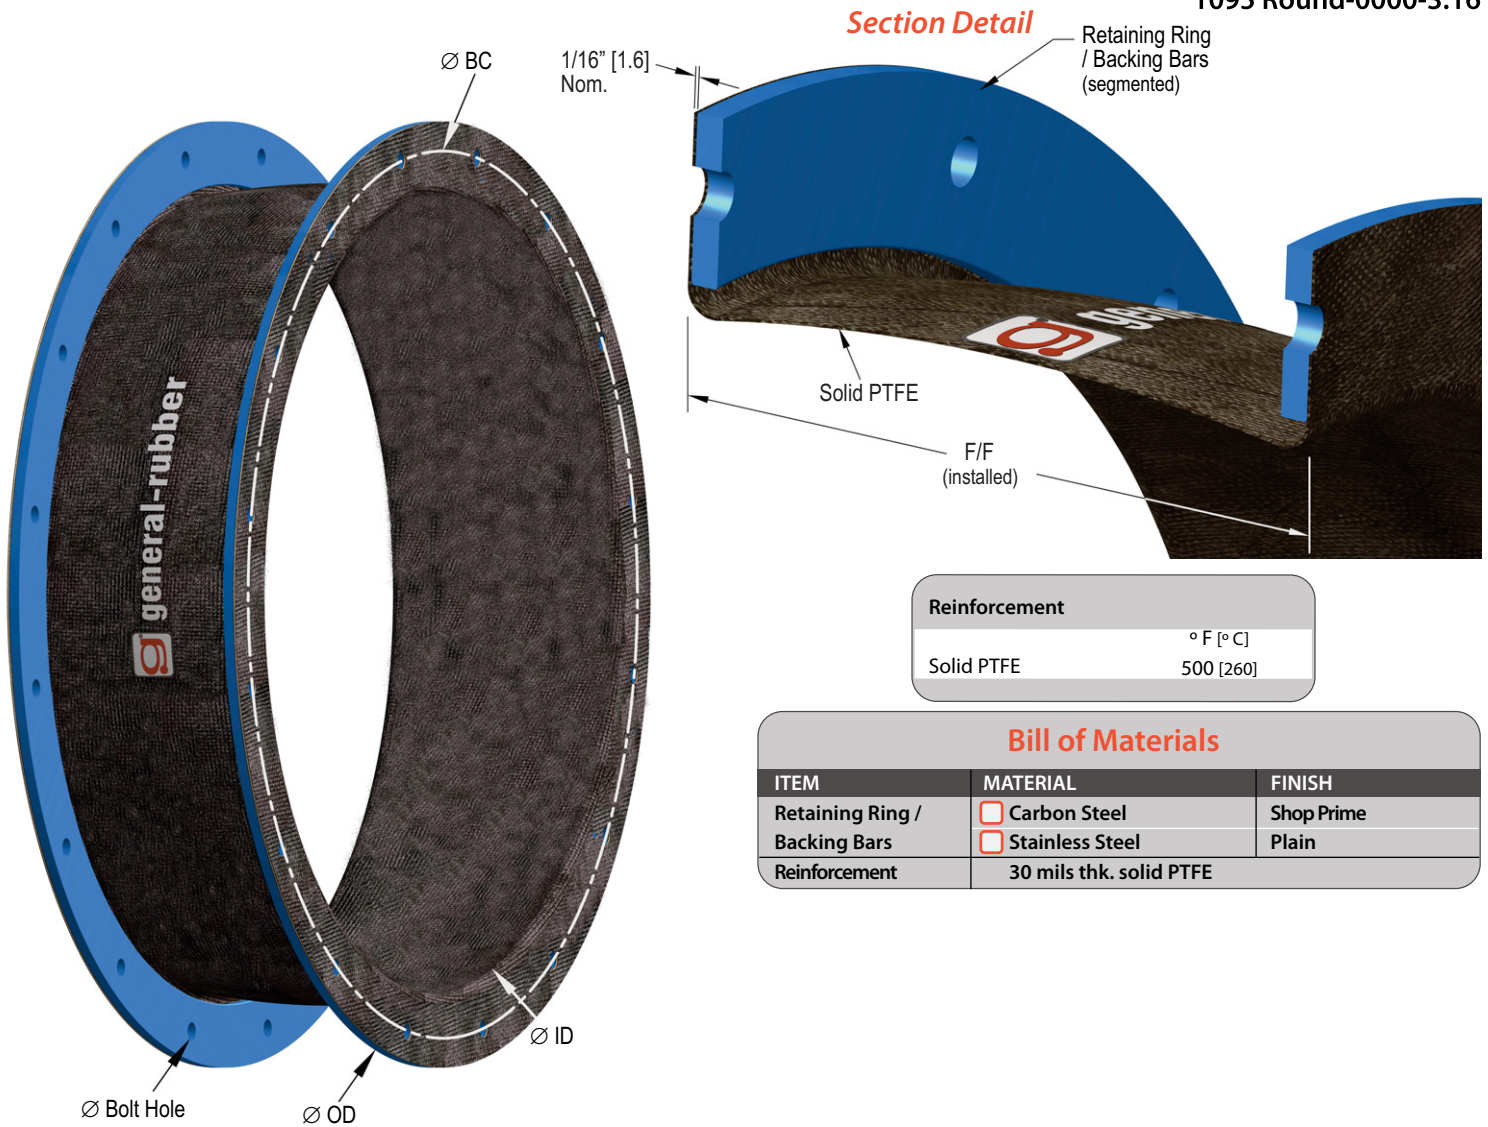

Reinforcement	
Solid PTFE	° F [° C] 500 [260]

Bill of Materials		
ITEM	MATERIAL	FINISH
Retaining Ring / Backing Bars	<input type="checkbox"/> Carbon Steel <input type="checkbox"/> Stainless Steel	Shop Prime Plain
Reinforcement	30 mils thk. solid PTFE	

Operational Parameters (customer specified)

Size ID (DN) <input type="text"/>	BC <input type="text"/>	OD <input type="text"/>	Pressure <input type="text"/>	F/F <input type="text"/>
Hole Dia. <input type="text"/>	No. Holes <input type="text"/>	Qty <input type="text"/>	Vacuum <input type="text"/>	Temp. <input type="text"/>

SIZE		MOVEMENT (non-concurrent)			PRESSURE	
Installed Lengths F/F in [mm]	MFD Length F/F + in [mm]	Comp. in [mm]	Ext. in [mm]	Lateral in [mm]	Pressure psig [barg]	Vacuum psig [barg]
3 1/2 [89] -6 [152]	1/2 [13]	2 [51]	1/2 [13]	1 [25]	3 [0.2]	-3 [-0.2]
6 1/2 [165] -9 [229]	3/4 [19]	3 [76]	3/4 [19]	2 [51]	3 [0.2]	-3 [-0.2]
9 1/2 [241] -12 [305]	1 [25]	4 [102]	1 [25]	3 [76]	3 [0.2]	-3 [-0.2]
12 1/2 [318] -16 [406]	1 [25]	5 [127]	1 [25]	4 [102]	3 [0.2]	-3 [-0.2]

Available in round or rectangular, hot dipped galvanized rings, custom offsets as well as reducing arrangements. Available in external or internal flanges.

Contact General Rubber Corporation for full product specifications, Warnings and installation instructions.

© 2016 General Rubber Corporation, All Rights Reserved

general-rubber.com