

SoundZorber®

Rubber Ring Mounts

Style MRR

Rubber Ring Mounts



Style MRR

Features:

- Multiple-Layer Configuration, for Varying Deflection Requirements
- Isolates High Frequency Vibration
- Rugged and Simple Construction
- Low Cost and Easy to Install
- Leveling Bolt Standard

Applications:

- Floor Mounted Equipment Including Pumps, Blowers, Compressors, Measuring Instruments and Transformers, as well as Gymnasiums or Other Floating Floors, Walls and Ceilings

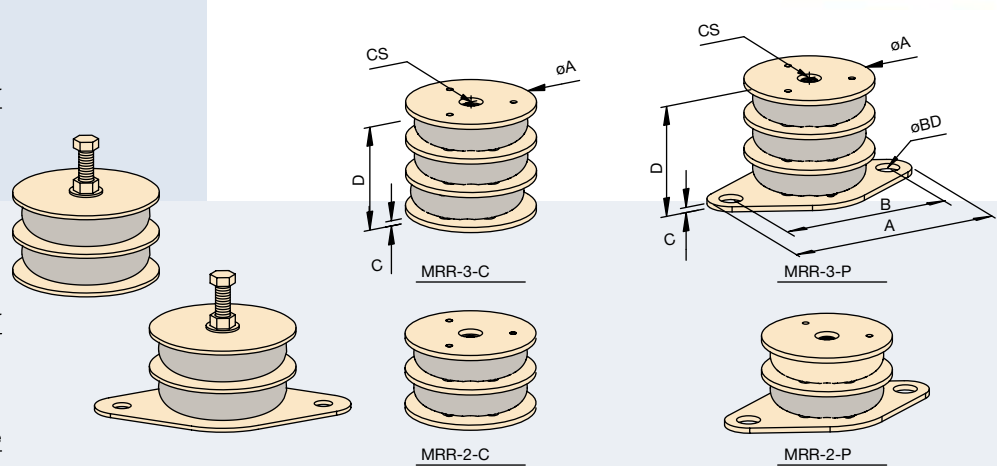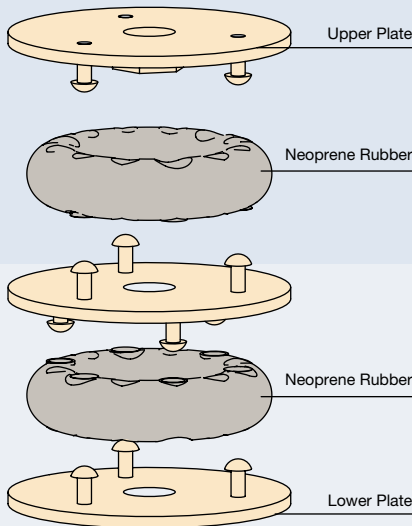

PART NUMBER	MAX. AXIAL STATIC LOAD RATING (lbs)	DIMENSIONS				BOLT OR NUT SIZE	CS	STATIC DEFLECTION (inch)	NATURAL FREQUENCY (Hz)
		A (inch)	BD (inch)	C (inch)	D (inch)				
MRR-2-2	200	2.36	0.43	0.12	1.38	5/16	M8	0.43	7.5
MRR-3-2	200	2.36	0.43	0.12	2.01	5/16	M8	0.59	6.2
MRR-2-4	400	3.15	0.51	0.12	1.85	3/8	M10	0.55	6.4
MRR-3-4	400	3.15	0.51	0.12	2.68	3/8	M10	0.79	5.4
MRR-2-8	800	4.72	0.59	0.12	2.64	1/2	M12	0.79	5.2
MRR-3-8	800	4.72	0.59	0.12	3.86	1/2	M12	1.18	4.4
MRR-2-16	1600	6.30	0.75	0.20	3.39	5/8	M16	1.06	4.6
MRR-3-16	1600	6.30	0.75	0.20	4.96	5/8	M16	1.61	3.8

Notes:

1.) The "-2" or "-3" after "MRR" in the part number indicates the number of layers. Configurations with nuts or bolts are specified by a "N" or "B" respectively.

