

SoundZorber®

Seismic Cables & Snubber Restraints

Style SCR

Features:

- Galvanized Aircraft Cable Attached to Angle Support Brackets
- 1/8", 1/4" or 3/8" Diameters for 680 lbs, 2400 lbs, or 4200 lbs Load Respectively
- Field Adjustable Lengths

Applications:

- Ideal Way to Restrain Suspended Equipment, Piping, and Ducting from Seismic Events

Style SSR


Seismic Snubber Restraints

Features:

- All Directional Restraints
- Rugged Welded Steel or Ductile Iron Housing
- Neoprene Stopper Prevents Metal Contact and Decelerates Impact Forces

Applications:

- Snubbers Are Used to Add All Directional Restraint to Bases Equipped with Free Standing Spring Mounts

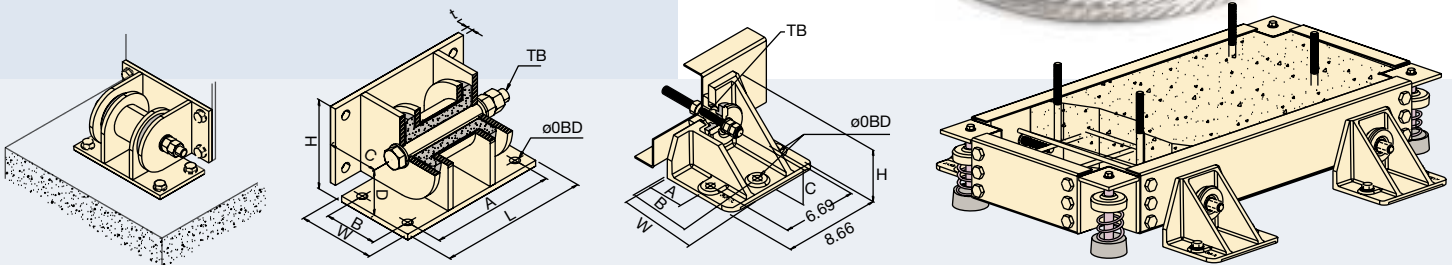

TYPE	1G ALL DIRECTIONAL LOAD RATINGS	DIMENSIONS						CENTER BOLT TB
		W (inch)	H (inch)	øBD (inch)	A (inch)	B (inch)	C (inch)	
SSR-500-1000 All Directional Seismic Snubbers								
SSR-500	500 (lbs)	6.69	6.30	0.71	3.54	—	3.54	5/8"
SSR-1000	1000 (lbs)	7.87	7.68	0.71	3.54	6.50	4.72	3/4"

TYPE	1G ALL DIRECTIONAL LOAD RATINGS	DIMENSIONS									
		L (inch)	W (inch)	A (inch)	B (inch)	C (inch)	D (inch)	øBD (inch)	H (inch)	TB	t (inch)
SSR-1500-5000 All Directional Seismic Snubbers											
SSR-1500	1500 (lbs)	12.20	6.30	10.24	4.33	4.21	4.21	0.75	7.36	M24	0.47
SSR-5000	5000 (lbs)	13.78	7.48	11.42	5.12	5.28	5.28	0.98	9.02	M30	0.75

