



**general
rubber**

800-233-6294


Customer: _____ Date: _____

Job/Project: _____

Ref/Tag: _____

Style 1091 Rubber Slip-On Sleeve

1091-0000-3.16

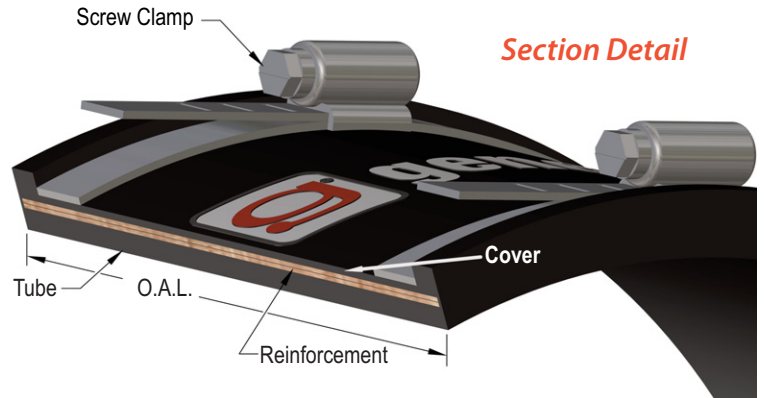

	Pure Gum	Neoprene	Butyl	Nitrile (Buna-N)	EPDM	Viton® (FKM)
Tube	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cover	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Tire Cord:	° F [° C]	° F [° C]	° F [° C]	° F [° C]	° F [° C]	° F [° C]
<input type="checkbox"/> Polyester	180 [82]	225 [107]	250 [121]	210 [99]	250 [121]	250 [121]
<input type="checkbox"/> Kevlar®	180 [82]	225 [107]	300 [149]	210 [99]	350 [177]	400 [204]

Maximum Temperature rating based on lowest temperature material selected. EPDM or Butyl w/Polyester rated 300°F (149°C) for Air Service up to 5 psig (0.34 barg)

Bill of Materials

ITEM	MATERIAL	FINISH
Screw Clamps	Stainless Steel	Plain
Textile Reinforcement	Tire Cord	RFL Coating

Operational Parameters (customer specified)

∅ ID (DN)

Quantity <input type="text"/>	Size ID (DN) <input type="text"/>	O.A.L. <input type="text"/>
	Pressure <input type="text"/>	Vacuum <input type="text"/>

SIZE	MOVEMENT (non-concurrent)			PRESSURE	
O.A.L. Available in [mm]	Comp. in [mm]	Ext. in [mm]	Lateral in [mm]	Pressure psig [barg]	Vacuum psig [barg]
4 [102] or 5 [125]	1/8 [3]	1/8 [3]	1/8 [3]	5 [0.34]	-5 [-0.34]