



Style 1097 Open Ended Flat Belt

1097 Open Ended Flat Belt-0000-8.21

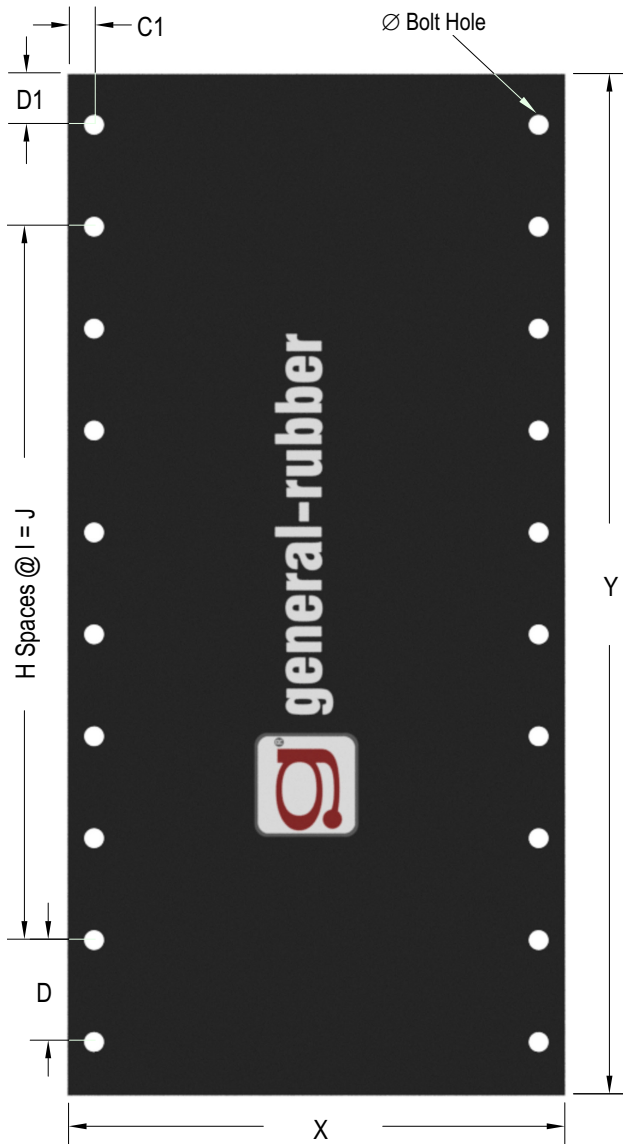

*Section Detail
(shown undrilled)*

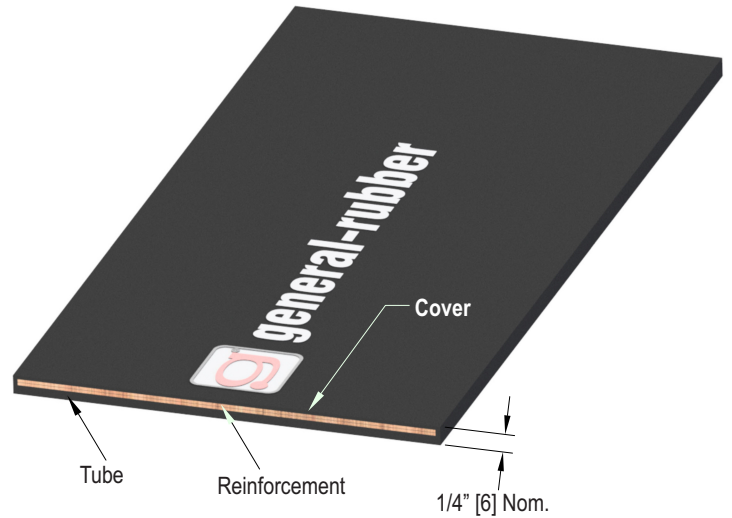

	Neoprene	Butyl	Nitrile (Buna-N)	EPDM	Viton® (FKM)
Tube /Cover	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Reinforcement: Polyester, Fiberglass, or Kevlar® Available	° F [° C] 225 [107]	° F [° C] 250 [121]	° F [° C] 210 [99]	° F [° C] 250 [121]	° F [° C] 250 [121]
Higher Temperature rating available based on reinforcement selection, contact general rubber.					

Operational Parameters (customer specified) Belt can be supplied drilled (slotted holes available) or undrilled.

X	<input type="text"/>	Y	<input type="text"/>	D	<input type="text"/>	D1	<input type="text"/>	Hole Dia.	<input type="text"/>	Pressure	<input type="text"/>
H	<input type="text"/>	I	<input type="text"/>	J	<input type="text"/>	C1	<input type="text"/>	No. Holes	<input type="text"/>	Qty.	<input type="text"/>